

## Riverview Series, Model B76 Surface Mount 4, 6, and 8 Ft. Bench with R-Type Thermo-plastic Coated Perforated Steel Seat

SPECIFICATION
BULLETIN
#SPC-BC-189

REV. 08-10



**Model B76/CE-6RU** Surface Mount Bench with burgundy powder coat frames, 6 ft. long with blue thermo-plastic coated R-Type perforated steel seat.

- Comfortable seat design may be accessed from either side
- Wide frame curves form comfortable armrests
- Sturdy, formed and welded steel frame construction
- Powder Coat frame finish
- Thermo-plastic Coating heat fused to Perforated Steel Seat for durability
- Thermo-plastic Coating formulated with U.V. stabilizers for ultraviolet protection
- Quality construction throughout

## **SPECIFICATIONS:**


- Model B76 Series end frames are one-piece welded construction with frame to meet 2" nominal steel pipe size specifications (2-3/8" O.D.) and each corner to be formed on a nominal 6" centerline radius.
- Model B76-4 is a nom. 4 ft. in length.
- Model B76-6 is a nom. 6 ft. in length.
- Model B76-8 is a nom. 8 ft. in length.
- Frames are supported by horizontal brace of 1.66" O.D. x 14 ga. wall steel pipe that connects the frames of the bench.
- Bench is designed to be permanently surface mounted using 9/16" dia. holes provided in each base plate for use with concrete anchors (anchors not included).
- **Standard:** All steel frame components are finished in Black powder coat (indicated by "/CB" in model no., e.g. B76/CB-4RW).
- R-Type seat is a one-piece welded construction, fabricated from a 14 ga. perforated steel surface with 9/16" dia. holes in a 13/16" center to center in-line pattern welded to 7 ga. end plates reinforced with 3/16" flat steel bar and 1/2" dia. round steel bar. Seat edges have a 1-13/16" radius roll to form a smooth curved outer edge of seat. Substructure includes all mounting holes for easy assembly of table.
- **Standard:** All steel surfaces of the seat are covered with a thermo-plastic coating in a Brown color (indicated by "RW" in model no., e.g. B76/CB-4RW). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- All fasteners are provided for assembly.
- **Optional:** Color choices of powder coated steel frame components. For optional color choices see Specification Bulletin #SPC-CO-001.
- **Optional:** Color choices of Thermo-plastic coated steel components. For optional colors choices see Specification Bulletin #SPC-CO-001.

## **AVAILABLE OPTIONS**

4', 6' or 8' models


Choice of colors of powder coat finish on steel frame components

Choice of colors of Thermo-plastic Coating

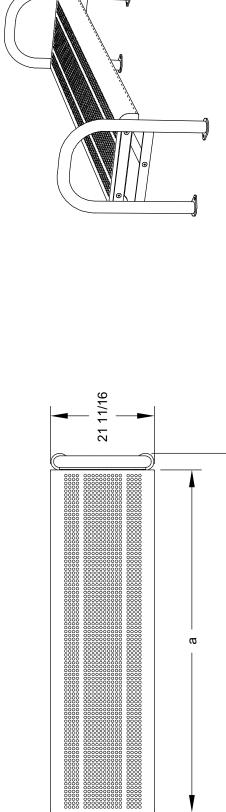


Ø

Ω



MODEL		DIMENSION	Z
	а	q	၁
B76-4	48 1/4	54 1/2	8/9 09
B76-6	72 1/4	78 1/8	74 5/8
B76-8	101	102 1/8	8/2 86



OF MOUNTING HOLES CENTER TO CENTER

ALL DIMENSIONS IN INCHES

P.O. Box 946 • Cherokee, IA 51012-0946 RJThomas Mfg. Co., Inc.

DRAWN BY MWW M

TITLE RIVERVIEW SERIES MODEL B76 4, 6, AND 8 FOOT FLAT SURFACE MOUNT BENCH WITH THERMO-PLASTIC COATED R-TYPE PERFORATED STEEL SEAT

8-18-10 DATE

AI-1957 DWG. NO.

Specification Bulletin SPC-BC-189