



*Model XTX/CB-8DU 8 Ft. Extra Heavy Duty Portable Rectangular
Utility Table with black powder coated frames
and Blue thermo-plastic coated expanded steel top*

- **Constructed specifically for heavy use areas**
- **All welded end frames are fabricated from 2-3/8" diameter steel pipe**
- **Die-formed center channel and diagonal braces align and strengthen entire table**
- **Frames are hot dip galvanized after fabrication for superior corrosion resistance**
- **Thermo-plastic coating heat fused to expanded steel top for durability**
- **Thermo-plastic coating formulated with U.V. stabilizers for ultraviolet protection**

SPECIFICATIONS:

- **XTX Series** end frames are one-piece welded construction, fabricated from 2.375" O.D. (2-3/8" O.D.) steel pipe to meet 2" nominal steel pipe size specifications with 2" x 2" x 3/16" A-36 structural grade steel angle for attaching the top. Frame foot is formed with flattened and rounded ends. A 9/16" hole is provided in each end of foot for optional surface mounting with concrete anchors (anchors not included).
- **Model XTX/G-6** is a nominal 6 ft. long.
- **Model XTX/G-8** is a nominal 8 ft. long.
- **Model XTX/G-10** is a nominal 10 ft. long and includes an additional center frame.
- Nominal table height is 30".
- Frames are supported by diagonal braces of 1-5/16" O.D. steel pipe that connect to the underside of the top designed to align and provide attachment to the table top.
- **Standard:** All steel frame components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. XTX/G-8DW).
- All galvanized fasteners are provided for assembly.
- **D-Type** table top is a one-piece welded construction, fabricated from a 3/4-#9 expanded steel surface with 2" roll-formed 14 ga. steel vertical edges on all sides and reinforced by a strap and die-formed angle substructure.
- **Standard:** All steel surfaces of the top are covered with a thermo-plastic coating in a Brown color (indicated by "DW" in model no., e.g. XTX/G-6DW). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- **Optional:** All steel frame components have powder coat finish. See Specification Bulletin #SPC-CO-001.
- **Optional:** Color choices of Thermo-plastic coated steel components. For optional colors choices see Specification Bulletin #SPC-CO-001.

AVAILABLE OPTIONS



- 6', 8' and 10' lengths
- Powder Coat Finish in choice of colors for steel frame components
- Choice of colors of Thermo-plastic Coating

RJThomas Mfg. Co., Inc.



PO Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796

E-Mail: pilotrock@rjthomas.com • Web Site: <http://www.pilotrock.com>

© 2011 RJThomas Mfg. Co., Inc. PILOT ROCK® Park Products is a registered trademark of RJThomas Mfg. Co., Inc.

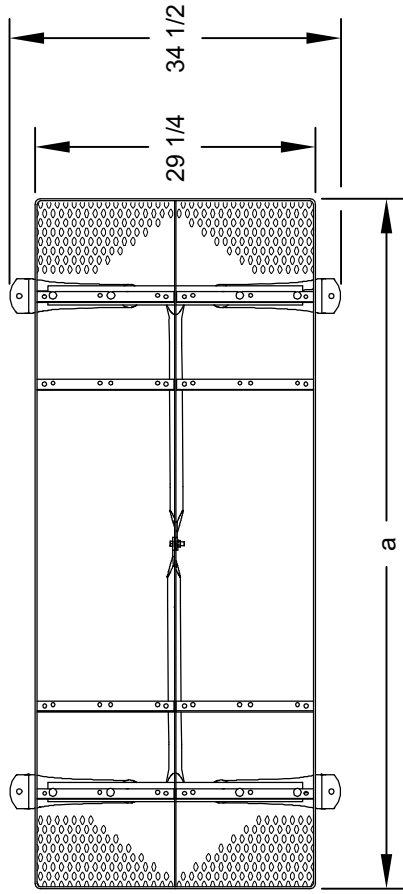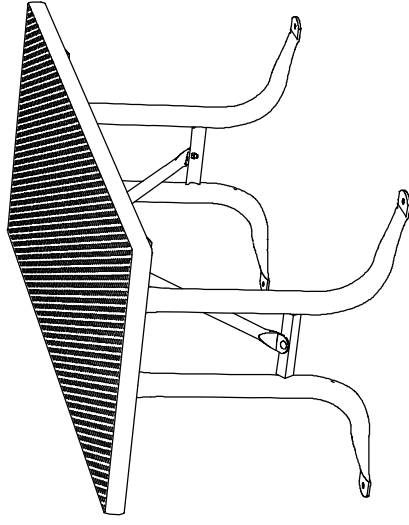

| MODEL | DIMENSIONS | | CENTER FRAME |
|--------|------------|--------|--------------|
| | a | b | |
| XTX-6 | 72 | 51 3/4 | NO |
| XTX-8 | 96 | 70 | NO |
| XTX-10 | 120 | 51 3/4 | YES |

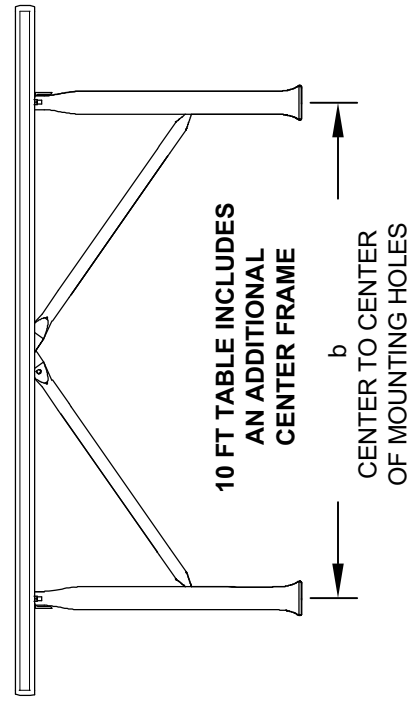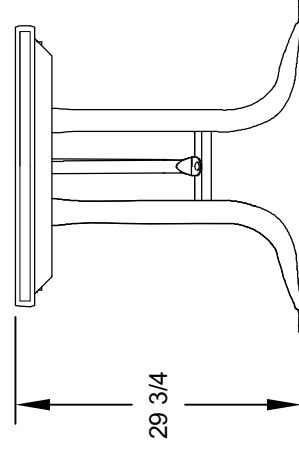

ALL DIMENSIONS IN INCHES

RJ Thomas Mfg. Co., Inc.
 P.O. Box 946 • Cherokee, IA 51012-0946

DRAWN BY
WWM

TITLE XTX SERIES 6, 8, AND 10 FT PORTABLE, RECTANGULAR UTILITY TABLE
 WITH THERMO-PLASTIC COATED D-TYPE EXPANDED STEEL TOP

DATE 3-15-11

DWG. NO. **AI-2004**