

WUT Series 6 and 8 Foot Universal Accessible Rectangular Table with R-Type Thermo-plastic Coated Perforated Steel Top and Seats

SPECIFICATION
BULLETIN
#SPC-TB-101

REV. 02-18



Model WUT/CB-6RA 6 Ft. Portable, Universal Accessible Rectangular Table with black powder coated frames and gray thermo-plastic coated R-Type perforated steel top and seats


- Strong 1-5/8" diameter all welded, steel pipe end frame construction
- Nontip, nontrip, walk-through design with wheelchair accessibility at each end
- Full capacity seating when wheelchairs are not in place
- Frames are hot-dip galvanized after fabrication for superior corrosion resistance
- Diagonal bracing for strength and rigidity
- Thermo-plastic Coating heat fused to Perforated Steel Top and Seats for durability
- Thermo-plastic Coating formulated with U.V. stabilizers for ultraviolet protection
- Quality construction throughout
- Limited Lifetime Warranty on frames


AVAILABLE OPTIONS

6 or 8 foot lengths
Choice of colors of Powder Coat Finish on steel
frame components
Choice of colors of Thermo-plastic Coating


SPECIFICATIONS:


- WUT Series end frames are one-piece welded construction, fabricated from 1.66" OD x 10 ga. wall steel pipe to meet 1-1/4" nominal steel pipe size specifications with 2" x 2" x 1/8" die-formed steel angle for attaching the top and seats. Bends are tightly formed to prevent tipping when weight is on one side.
- The frame design provides the ADA recommended wheelchair clearance under the table top of: 30" wide, 27" high, and 24" total knee and toe clearance (19" knee + 5" toe) at each end of the table while maintaining the full seating capacity of the table for common use.
- Table frame incorporates nontip, nontrip, walk-through design features.
- Model WUT/G-6 has a nom. 6 ft. length.
- Model WUT/G-8 has a nom. 8 ft. length.
- Nominal table height is 30". Frame design provides a nominal 28" of clearance from ground level to the underside of table. Nominal seat height is 18".
- \bullet Frames are supported by diagonal braces of 1-5/16" OD x 14 ga. wall steel pipe that align and provide attachment to the table top.
- All galvanized fasteners are provided for assembly.
- **Standard:** All steel frame components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. WUT/G-6RW).
- ullet R-Type table top and seats are each one-piece welded construction, fabricated from a 14 ga. perforated steel surface with 9/16" dia. holes in a 13/16" center to center in-line pattern and 2" formed 14 ga. steel vertical edges on all sides and reinforced by a strap and die-formed angle substructure.
- **Standard:** All steel surfaces of the top and seats are covered with a thermo-plastic coating in a Brown color (indicated by "RW" in model no., e.g. WUT/G-6RW). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- **Optional:** All steel frame components have powder coat finish. See Specification Bulletin #SPC-CO-001.
- **Optional:** Color choices of Thermo-plastic coated steel components. For optional colors choices see Specification Bulletin #SPC-CO-001.
- •U.S. Patent Nos. D489,539; D490,992; D493,291; D496,799; D497,262; 6,918,630

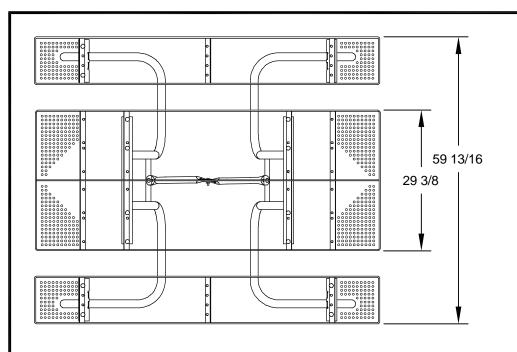

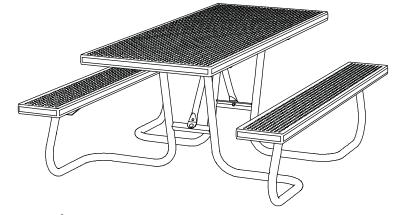

MODEL NUMBER	DIMENSION	
	а	b
WUT-6	72	19-3/4
WUT-8	96	37-5/8

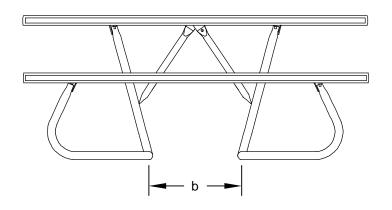

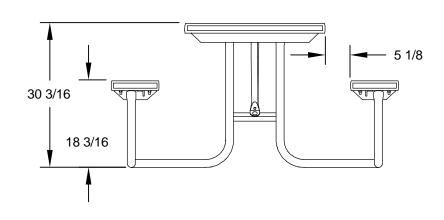

ALL DIMENSIONS IN INCHES

RJThomas Mfg. Co., Inc. P.O. Box 946 • Cherokee, IA 51012-0946 DRAWN BY

TITLE MODEL WUT 6 AND 8 FOOT UNIVERSAL ACCESSIBLE RECTANGULAR TABLE WITH THERMO-PLASTIC COATED R-TYPE PERFORATED STEEL TOP AND SEATS

DATE 3-16-10

DWG. NO. AI-1792