

APTX Series 6 and 8 foot Double Pedestal Rectangular Utility Table with Thermo-plastic Coated R-Type Perforated Steel Top

SPECIFICATION BULLETIN
#SPC-AM-006

REV. 01-10



Model APTX/CW-6RA 6 ft. embedded mount double pedestal rectangular Utility table with Brown Powder Coated frame and Gray R-Type Thermo-plastic Coated Perforated Steel top


- · Permanent embedded mounting
- Sturdy 3" x 6" rectangular steel tube pedestals
- Frames are hot-dip galvanized after fabrication for superior corrosion resistance
- Thermo-plastic Coating heat fused to Perforated Steel Top for durability
- · Quality construction throughout

SPECIFICATIONS:

- APTX Series Table top end frames are onepiece welded construction, fabricated from 3" x 6" 1/8" wall rectangular structural steel tubing with 2" x 2" x 3/16" A-36 structural grade steel angle for attaching the top. Exposed ends of rectangular tubing are permanently sealed with welded-on steel end caps. Frames are designed to be embedded in a concrete footing.
- Model APTX/G-6 has a nominal length of 72".
- Model APTX/G-8 has a nominal length of 96".
- Nominal table height is 32".
- **Standard:** All frame components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. APTX/G-6RW).
- R-Type table top is one-piece welded construction, fabricated from a 14 ga. perforated steel surface with 9/16" dia. holes in a 13/16" center to center in-line pattern and 2" roll-formed 14 ga. steel vertical edges on all sides and reinforced by a strap and die-formed angle substructure.
- **Standard:** All steel surfaces of the top are covered with a thermo-plastic coating in a Brown color (indicated by "RW" in model no., e.g. APTX/G-6RW). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- All fasteners are provided for assembly.
- **Optional:** Color choices of thermo-plastic coated steel components. For optional colors choices see Specification Bulletin #SPC-CO-001.
- **Optional:** Color choices of powder coated steel frame components. For optional colors choices see Specification Bulletin #SPC-CO-001.
- **Optional:** Frames are provided with a 3/8" x 8" x 8" steel base plate to bolt table to existing concrete pad. To specify add "/P" after the "APTX" in the model no., e.g. APTX/P/G-6RW. (Anchor bolts not included.)

AVAILABLE OPTIONS

6' or 8' lengths Choice of colors of Powder Coat Finish for steel frame components Choice of colors of Thermo-plastic Coated Perforated Steel Surface mount base plate

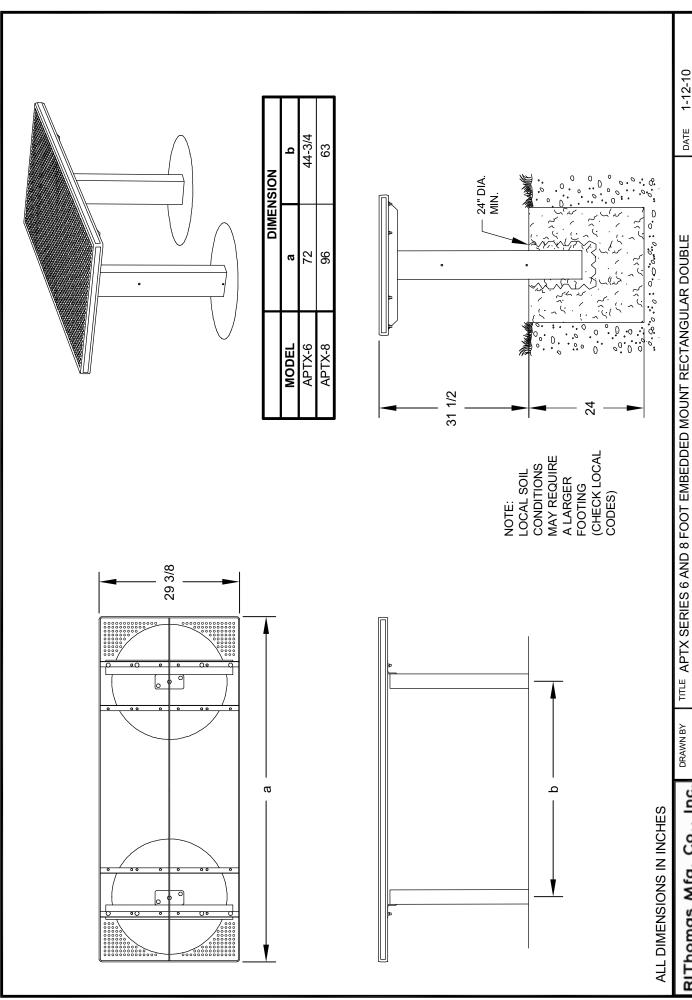

TITLE APTX SERIES 6 AND 8 FOOT EMBEDDED MOUNT RECTANGULAR DOUBLE PEDESTAL UTILITY TABLE WITH R-TYPE THERMO-PLASTIC COATED PERFORATED STEEL TOP DRAWN BY MWW M

AI-1780

DATE 1 DWG. NO.

Specification Bulletin SPC- AM-006

RJThomas Mfg. Co., Inc. P.O. Box 946 • Cherokee, IA 51012-0946