



Model FSW-30/18/PA/H/S Wheelchair Accessible Campfire Ring with swivel cooking grate and heat shield.

(Below) Grate shown rotated out of the firing.



- **Meets ADA guidelines, requires less than five pounds of force with one hand to move grate out of firing**
- **Handle is never over the fire**
- **Flanged firing for strength and safety**
- **Public use-type spring grips of coiled steel bar**
- **Elevated cooking grate and firebed conform to ADA guidelines**
- **Required aggregate fill protects site surfaces such as paver blocks, cement, and asphalt from heat damage**
- **Heat Shield**
- **Quality construction throughout**

SPECIFICATIONS:

- **FSW Series** firing is designed to meet ADA guidelines requiring less than five pounds of force with one hand to operate the grate.
 - 32" overall dia. firing is constructed from 3/16" thick steel with a formed (NOT WELDED) 1" flanged lip around the top of the ring and ten 1" dia. drain/draft/anchor holes located around the perimeter.
 - **Model FSW-30/18/PA/H** firing side height is 16-7/8".
 - **Model FSW-30/24/PA/H** firing side height is 23-3/8".
 - The single level, 300 sq. in. cooking grate is constructed from 1/2" dia. A-36 steel bars around the perimeter, 5/8" dia. A-36 steel bar for the handle, and 1/2" dia. A-36 steel bar for the grate bars.
 - Grate is provided with a substantially constructed spring grip suitable for public use made from 1/8" x 1/2" flat bar (not wire springs).
 - Grate is mounted on a 2-3/8" OD tube allowing it to rotate on a horizontal plane out of the firing. Two welded-on stops limit rotation to 180° to prevent the handle entering the area over the fire.
 - Firing is designed to be filled with customer supplied aggregate fill to a minimum of 9" above ground level to conform with ADA guidelines to raise fire to proper height. Fill also protects hard surfaces from heat damage.
 - Unit is provided with three 1/2" dia. anchor pins for concrete embedment (indicated by **"/PA"** in model no., e.g. FSW-30/18/PA/H).
 - Entire unit is finished in high temperature, heat resistant, nontoxic black enamel paint.
 - Firing is provided with an 8" high heat shield constructed from 10 ga. steel welded on to new firings. Heat shield provides a 7/8" cooling air gap around the area of the firing exposed to the fire (indicated by **"/H"** in model no., e.g. FSW-30/18/PA/H).
 - **Optional:** Firing is provided with a 3/16" x 7-1/8" x 9-5/8" steel plate utility shelf. (Add **"/S"** to model no., e.g. FSW-30/18/PA/S.)
- Note: The optional utility shelf fits both firing and optional heat shield. (When ordering both options, add **"/H/S"** to model no., e.g. FSW-30/18/PA/H/S.)



AVAILABLE OPTIONS

Utility Shelf

RJ Thomas Mfg. Co., Inc.



PO Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796
E-mail: pilotrock@rjthomas.com • Web Site: <https://www.pilotrock.com>

© 2022 RJ Thomas Mfg. Co., Inc. PILOT ROCK® Park Products is a registered trademark of RJ Thomas Mfg. Co., Inc.

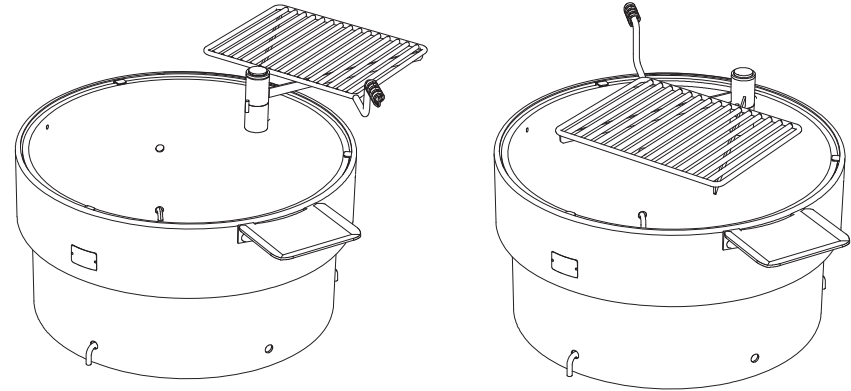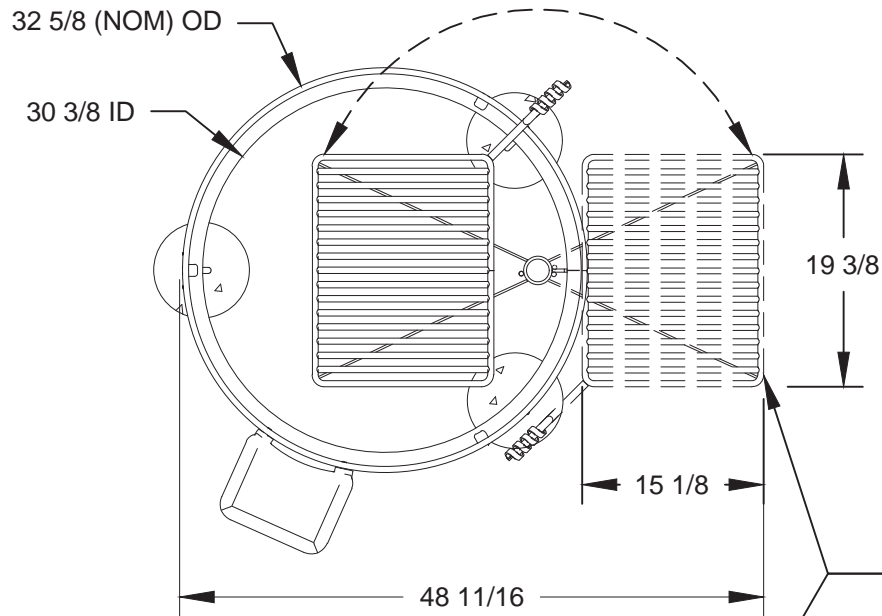

GRATE ROTATES 180 DEGREES TO OUTSIDE FIRING

MODEL NUMBER	DIMENSION		
	a	b	c
FSW-30/18	23 5/8	16 7/8	20 1/8
FSW-30/24	30 3/16	23 3/8	26 5/8

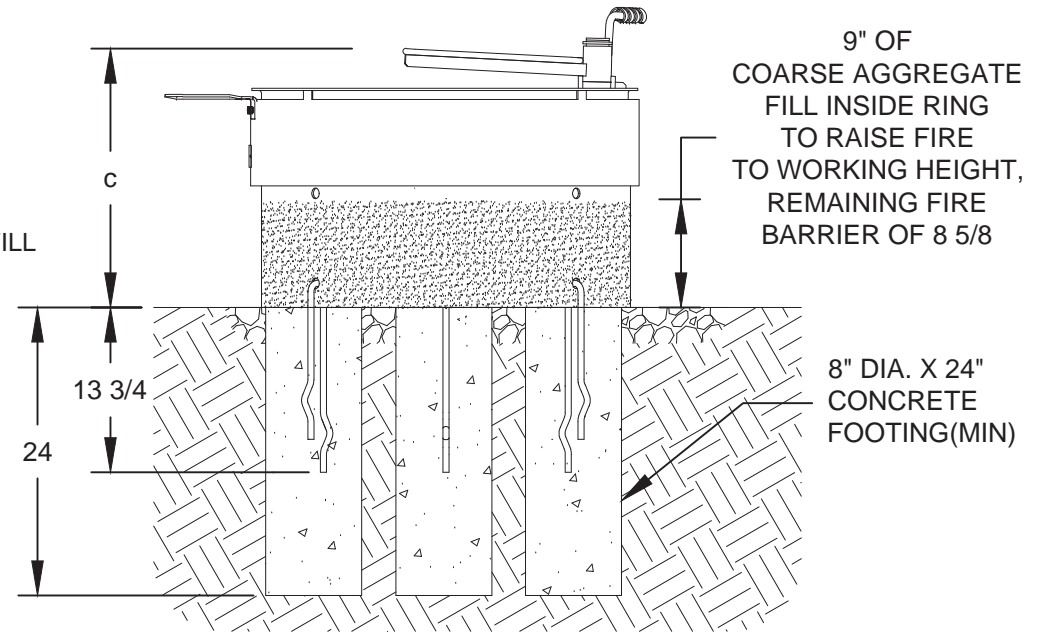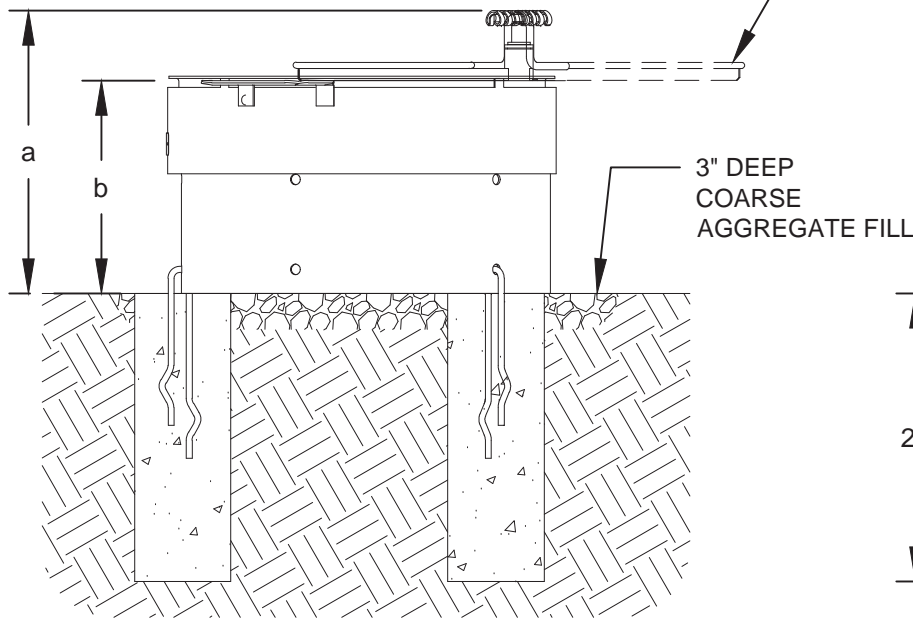

ALL DIMENSIONS IN INCHES

RJThomas Mfg. Co., Inc.
P.O. Box 946 • Cherokee, IA 51012-0946

DRAWN BY
JGJ

TITLE FSW SERIES MODELS FSW-30/18/PA/H AND FSW-30/24/PA/H ACCESSIBLE
SWIVEL GRATE FIRING WITH PIN ANCHORS AND HEAT SHIELD
- SHOWN WITH OPTIONAL UTILITY SHELF

DATE 04-12-2022

DWG. NO. AI-1947