

Model SCXB Embedded Mount 10 Ft. Bench with H-Type Thermo-plastic Coated Perforated Steel Back and Seat



Model SCXB3/CB-10HU12 Embedded Mount Bench with black powder coated frames, 6 Ft. long with 12" wide blue H-Type thermo-plastic coated perforated steel seat and back.

- Extra heavy design to be stronger and more stable with a simple, clean style
- Sturdy, formed and welded steel frame construction
- Frames are Hot-Dip Galvanized after fabrication for superior corrosion resistance
- Thermo-plastic Coating heat fused to Perforated Steel Seat and Back for durability
- Thermo-plastic Coating formulated with U.V. stabilizers for ultraviolet protection
- Quality construction throughout

AVAILABLE OPTIONS


Powder Coat Finish in choice of colors for steel frame components Choice of colors of Thermo-plastic Coating 10" or 12" seat and back width Custom Lettering available (call for details) Armrests

SPECIFICATIONS:

- Model SCXB end frames are one-piece, welded construction with a back and seat bracket of 2-3/8" x 1-1/2" x 1/8" nominal sized, die-formed channel, and a 2.375" (2-3/8") O.D. post to meet 2" nominal steel pipe size specifications. Bench leg is designed to be permanently embedded in concrete footings.
- Model SCXB3/G-10 is 10 ft. long (nom.) with three frames.
- **Standard:** Frames are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. SCXB3/G-10HW12).
- Standard: Seat and back are each 12" wide.
- •H-Type seat and back are each a one-piece welded construction, fabricated from a 14 ga. perforated steel surface with 9/16" dia. holes in a 13/16" center to center in-line pattern and 2-1/2" x 10 ga. roll-formed vertical edges on all sides reinforced by a 10 ga. die-formed angle substructure. Substructure includes all mounting holes for easy assembly of bench.
- **Standard:** All steel surfaces of the seat and back are covered with a thermo-plastic coating in a Brown color (indicated by "HW" in model no., e.g. SCXB3/G-10HW12). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- All fasteners are provided for assembly.
- **Optional:** Color choices of powder coated steel frame components. For optional colors choices see Specification Bulletin #SPC-CO-001.
- **Optional:** Color choices of Thermo-plastic coated steel components. For optional colors choices see Specification Bulletin #SPC-CO-001.
- •**Optional:** Seat and back are each a 10" wide one-piece welded construction with 10 ga. x 2-1/2" (2" on 4 ft. models) roll-formed vertical edges on all sides. Indicate choice by changing "12" in model no. to "10", e.g. SCXB3/G-10HW10.
- •**Optional:** A welded base plate on each leg with two 9/16" dia. holes designed to secure bench to hard surfaces. To specify, add "/P" after SCXB in model number, e.g. SCXB3/**P**/G-10HW10.

RJ Thomas Mfg. Co., Inc.

PO Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796 E-mail: pilotrock@rjthomas.com • Web Site: https://www.pilotrock.com © 2023 RJ Thomas Mfg. Co., Inc. PILOT ROCK[®] Park Products is a registered trademark of RJ Thomas Mfg. Co., Inc.

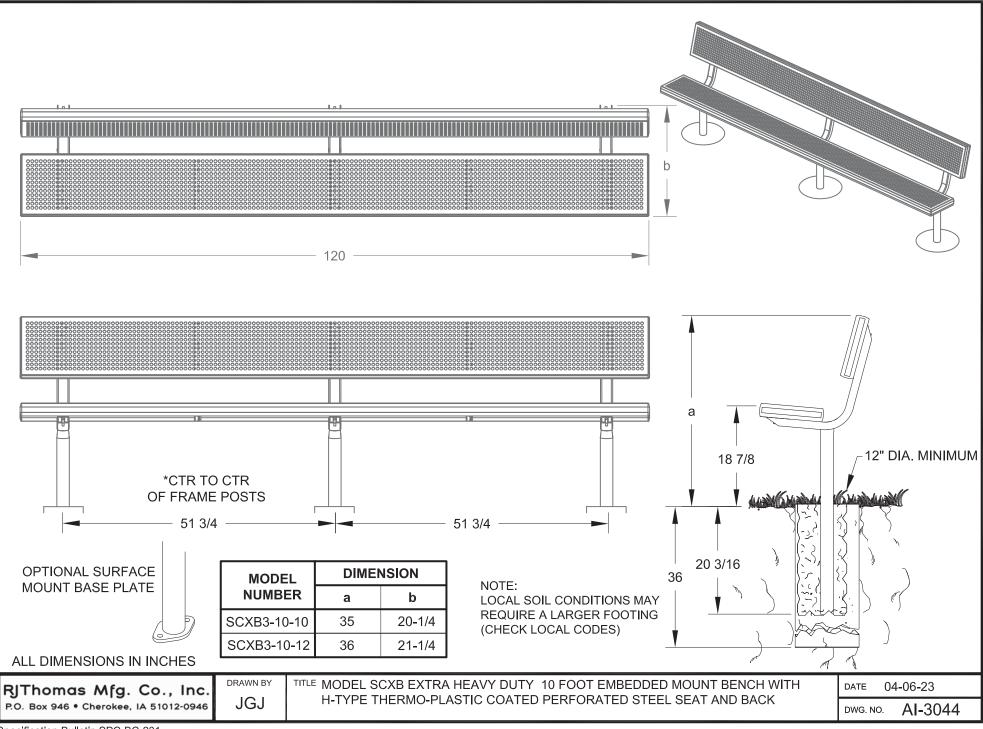

Specification Bulletin SPC-BC-231