

UT Series Heavy Duty Portable Rectangular Tables with Thermo-plastic Coated Steel Channel Top and Seats

SPECIFICATION
BULLETIN
#SPC-TB-238

REV. 09-17



Model UT/G-8SC/TU 8 Ft. Portable Rectangular Table with hot dip galvanized frames and blue thermo-plastic coated steel channel top and seats


- · Nontip, nontrip, walk-through design
- Strong 1-5/8" diameter all welded, steel pipe end frame construction
- Diagonal bracing for strength and rigidity
- Frames are hot-dip galvanized after fabrication for superior corrosion resistance
- Thermo-plastic Coating heat fused to Steel Channel Top and Seats for durability
- Thermo-plastic Coating formulated with U.V. stabilizers for ultraviolet protection
- Limited Lifetime Warranty on frames


SPECIFICATIONS:

- **UT Series** end frames are one-piece welded construction, fabricated from 1.660" O.D. (1-5/8" O.D.) steel pipe to meet 1-1/4" nominal pipe size specifications with 2" x 2" x 1/8" die formed steel angle for attaching the seats and tops.
- Table frame design incorporates nontip, nontrip, walkthrough design features. Bends are tightly formed to prevent tipping when weight is on one side.
- Model UT/G-6 is a nominal 6 ft. long.
- Model UT/G-8 is a nominal 8 ft. long.
- Nominal table height is 29-7/8". Nominal seat height is 18".
- Frames are supported by diagonal braces of 1-5/16" O.D. 14 ga. wall steel pipe that connect to the underside of the table top.
- **Standard:** All steel frame components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. UT/**G**-6SC/TW).
- All fasteners are provided for assembly.
- Steel channel top and seats are each a one-piece welded construction, fabricated from 16 ga. steel plate formed to nominal dimensions of 2" x 4" lumber, with 10 ga. bracing (indicated by "SC" in model no., e.g. UT/G-6**SC**/TW). Structure includes all mounting holes for assembly of bench.
- Standard: All steel surfaces of the top and seats are covered with a thermo-plastic coating in a Brown color (indicated by "/TW" in model no., e.g. UT/G-6SC/TW). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- **Optional:** Color choices of powder coated steel frame components. See Specification Bulletin #SPC-CO-001.
- **Optional:** Color choices of Thermo-plastic coated steel components. For optional colors choices see Specification Bulletin #SPC-CO-001.


AVAILABLE OPTIONS


6' or 8' length Powder Coat Finish in choice of colors for steel frame components Choice of colors of Thermo-plastic Coating

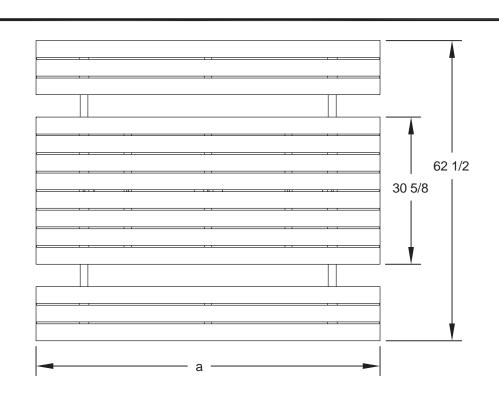

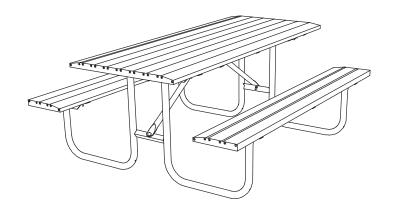

MODEL NUMBER	DIMENSION	
	а	b
UT-6	72	51-3/4
UT-8	96	70

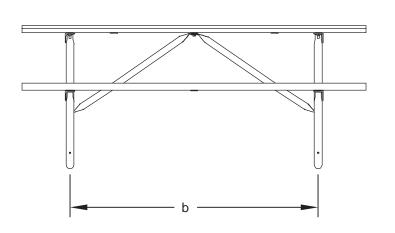

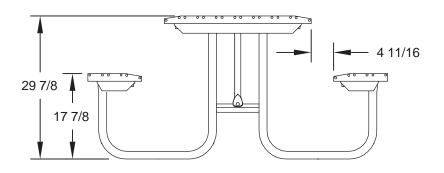

ALL DIMENSIONS IN INCHES

RJThomas Mfg. Co., Inc. P.O. Box 946 • Cherokee, IA 51012-0946 DRAWN BY

TITLE UT SERIES 6 AND 8 FOOT PORTABLE RECTANGULAR TABLE WITH THERMO-PLASTIC COATED STEEL CHANNEL TOP AND SEATS

DATE 5-30-12

DWG. NO. AI-2031