

UTH Series 6 and 8 Foot Accessible Raised Top Table, Extended One End with Lumber Top and Seats

SPECIFICATION
BULLETIN
#SPC-TB-123

REV. 09-17



Model UTH/G-6UP/E, 6 ft., Heavy Duty Wheelchair Accessible Portable Table, Extended 2 ft. One End, with hot dip galvanized Frames and Untreated Pine Top and Seats

- ADA compliant wheelchair accessibility at one end
- Nontip, nontrip walk-through design
- All welded end frames are fabricated from 1.66" diameter steel pipe
- Die-formed center channel and diagonal braces align and strengthen entire table
- Frames are hot dip galvanized after fabrication for superior corrosion resistance
- Precision drilled, Untreated #1 Southern Yellow Pine Top and seat Planks
- Limited lifetime warranty on frames

SPECIFICATIONS:


- UTH Series end frames are one-piece welded construction, fabricated from 1.660" O.D. (1-5/8" O.D.) steel pipe to meet 1-1/4" nominal pipe size specifications with 2" x 2" x 1/8" die formed steel angle for attaching the seats and tops. "Outriggers" are attached to the frame on the extended end of the table for added stability.
- Table frame design incorporates nontip, nontrip, walk-through design features. Bends are tightly formed to prevent tipping when weight is on one side.
- Table provides one wheelchair space at one end of table by extending the top 2 ft. creating a ADA recommended space of 30" wide, 19" deep, and 27" from ground to bottom of table top for knee space, and minimum 9" above ground extending a total of 24" deep for toe space. Indicated by "/E" at end of model no., e.g. UTH/G-6UP/E.
- A diagonal brace of 1-5/16" O.D. steel pipe and a die-formed steel channel is provided to support extended portions of table top and maintain planks against warping.
- Model UTH/G-6UP/E has a nom. 8 ft. long top and 6 ft. long seats. Includes frame stabilizing outriggers.
- Model UTH/G-8UP/E has a nom. 10 ft. long top and 8 ft. long seats.
- Frame design provides a nominal 30" of clearance from ground level to the underside of the table top and nominal seat top height of 20".
- Frames are supported by diagonal braces of 1-5/16" O.D. steel pipe that connect to a die-formed steel channel designed to align and provide attachment to the table top.
- All fasteners are provided for assembly.
- **Standard:** All steel frame components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. UTH/**G**-6UP/E).
- Standard: Lumber is Untreated #1 grade Southern Yellow Pine (indicated by "UP" in model no., e.g. UTH/G-6UP/E) 2" x 10" nominal sized planks, kiln dried to reduce moisture content. All lumber is precision drilled to facilitate assembly and has all exposed edges removed to a 3/8" radius.
- **Optional:** All steel frame components have powder coat finish. See Specification Bulletin #SPC-CO-001.
- Optional: Treated #1 Southern Yellow Pine is readily available and is pressure treated (KDAT) to preserve wood against decay. To specify, change "UP" in model no. to "TP", e.g. UTH/G-6TP/E. (Cedar, Fir and Redwood are available when in stock –please inquire.)


AVAILABLE OPTIONS

6' or 8' lengths


Powder Coat Finish in choice of colors on steel frame components


Pressure treated #1 Southern Yellow Pine lumber (Cedar, Fir, or Redwood lumber when in stock)

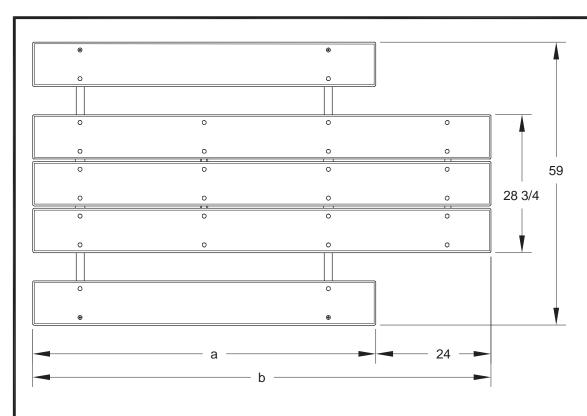

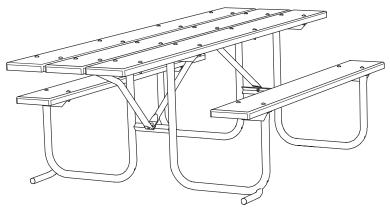

MODEL NUMBER	DIMENSION			STABILIZING
	а	b	С	OUTRIGGERS
UTH-6/E	71 1/2	95 1/2	51-3/4	INCLUDED
UTH-8/E	95 1/2	119 1/2	70	NOT REQUIRED

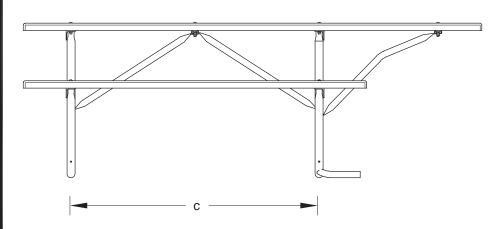

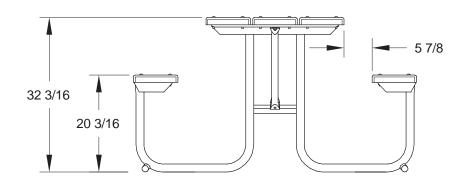

ALL DIMENSIONS IN INCHES

RJThomas Mfg. Co., Inc. P.O. Box 946 • Cherokee, IA 51012-0946 DRAWN BY

TITLE UTH SERIES 6 AND 8 FOOT RAISED TOP PORTABLE RECTANGULAR TABLE WITH TOP EXTENDED 2 FEET ON ONE END WITH LUMBER TOP AND SEATS

DATE 02-09-11
DWG. NO. AI-1756