PARK · STREET · CAMP

SITE PRODUCTS

WUT Series 10 and 12 Foot Universal **Accessible Rectangular Table** with Lumber Top and Seats

SPECIFICATION BULLETIN **#SPC-TB-160**

REV. 09-17



Model WUT/G-10UP Universal Accessible Rectangular Table with hot dip Galvanized frames, 10 ft. long with Untreated Pine top and seats.

- Strong 1-5/8" diameter all welded, steel pipe end frame construction
- Nontip, nontrip, walk-through design with wheelchair accessibility at each end
- Full capacity seating when wheelchairs are not in place
- Frames are hot-dip galvanized after fabrication for superior corrosion resistance
- Precision drilled, Untreated #1 Southern Yellow Pine Top and seat Planks
- · Two die-formed center channels under table top to support and align top planks
- Diagonal bracing for strength and rigidity
- **Quality construction throughout**
- Limited Lifetime Warranty on frames

AVAILABLE OPTIONS


10 or 12 foot lengths


Choice of colors of Powder Coat Finish on steel frame components

Pressure treated #1 Southern Yellow Pine lumber (Cedar, Fir, or Redwood lumber when in stock)


SPECIFICATIONS:


- WUT Series end frames are one-piece welded construction, fabricated from 1.66" OD x 10 ga. wall steel pipe to meet 1-1/4" nominal steel pipe size specifications with 2" x 2" x 1/8" die-formed steel angle for attaching the top and seats. Bends are tightly formed to prevent tipping when weight is on
- The frame design provides the ADA recommended wheelchair clearance under the table top of: 30" wide, 27" high, and 24" total knee and toe clearance (19" knee + 5" toe) at each end of the table while maintaining the full seating capacity of the table for common use.
- Table frame incorporates nontip, nontrip, walk-through design features.
- Model WUT/G-10 has a nom. 10 ft. length with three frames.
- Model WUT/G-12 has a nom. 12 ft. length with three frames.
- Nominal table height is 30". Frame design provides a nominal 28" of clearance from ground level to the underside of table. Nominal seat height is 18".
- Frames are supported by diagonal braces of 1-5/16" OD x 14 ga. wall steel pipe that connect to die-formed steel channels designed to align and provide attachment to the table top.
- All galvanized fasteners are provided for assembly.
- Standard: All steel frame components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. WUT/G-10UP).
- Standard: Lumber is Untreated #1 grade Southern Yellow Pine (indicated by "UP" in model no., e.g. WUT/G-10UP) 2" x 10" nominal sized planks, kiln dried to reduce moisture content. All lumber is precision drilled to facilitate assembly and has all exposed edges removed to a 3/8" radius.
- Two 1-5/8" x 1-5/16" x 14 ga. x 28" pregalvanized steel end caps are provided to align ends of top planks.
- Optional: All steel frame components have powder coat finish. See Specification Bulletin #SPC-CO-001.
- Optional: Treated #1 Southern Yellow Pine is readily available and is pressure treated (KDAT) to preserve wood against decay. To specify, change "UP" in model no. to "TP", e.g. WUT/G-10TP. (Cedar, Fir and Redwood are available when in stock -please inquire.)
- •U.S. Patent Nos. D489,539; D490,992; D493,291; D496,799; D497,262; 6,918,630

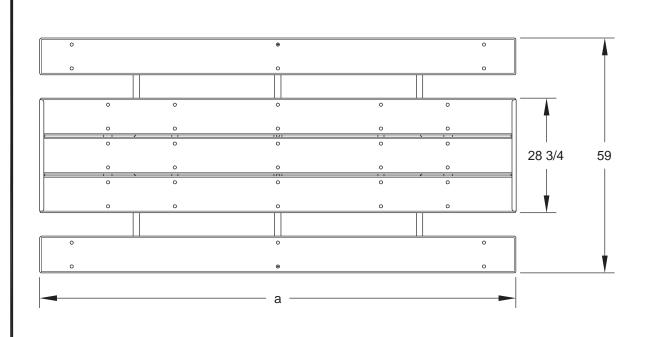



	DIMENSION	
MODEL	а	b
WUT-10	119 1/2	35 1/2
WUT-12	143 1/2	44 5/8

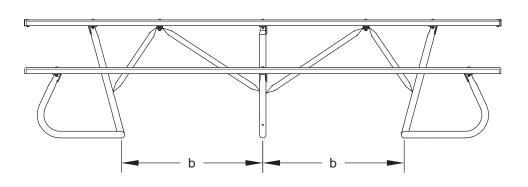

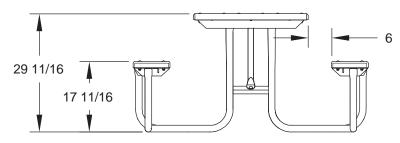

ALL DIMENSIONS IN INCHES

RJThomas Mfg. Co., Inc. P.O. Box 946 • Cherokee, IA 51012-0946 DRAWN BY
WWM

TITLE WUT SERIES 10 AND 12 FOOT UNIVERSAL ACCESSIBLE RECTANGULAR TABLE WITH LUMBER TOP AND SEATS

DATE 3-23-09

DWG. NO. AI-1871