



**Model FSWS-30/7/PA** Campfire Ring with swivel cooking grate.  
(shown with optional Utility Shelf)

(Below) Grate shown rotated out of the firering.



- **Handle is never over the fire**
- **Choose from three fire barrier heights**
- **Flanged firering for strength and safety**
- **Public use-type spring grips of coiled steel bar**
- **Quality construction throughout**

## SPECIFICATIONS:

- 32" overall dia. firering is constructed from 11 ga. (1/8" thick) stainless steel with a formed (NOT WELDED) 1" flanged lip around the top of the ring and ten 1" dia. drain/draft/anchor holes located around the perimeter.
- **Model FSWS-30/7/PA** firering side height is 7-1/4".
- **Model FSWS-30/9/PA** firering side height is 8-7/8".
- **Model FSWS-30/11/PA** firering side height is 11-1/4".
- The single level, 300 sq. in. cooking grate is constructed from 1/2" dia. A-36 steel bars around the perimeter, 5/8" dia. A-36 steel bar for the handle, and 1/2" dia. A-36 steel bar for the grate bars.
- Grate is provided with a substantially constructed spring grip suitable for public use made from 1/8" x 1/2" flat bar (not wire springs).
- Grate is mounted on a 2-3/8" OD tube allowing it to rotate on a horizontal plane out of the firering. Two welded-on stops limit rotation to 180° to prevent the handle entering the area over the fire. Installation of grate components is required by customer.
- Unit is provided with three 1/2" dia. anchor pins for concrete embedment (indicated by "/PA" in model no., e.g. FSWS-30/11/PA).
- Stainless steel ring is not painted. Swivel grate components are finished with high temp non-toxic black enamel paint.
- **Optional:** Firering is provided with a 3/16" x 7-1/8" x 9-5/8" black steel plate utility shelf. (Add "/S" to end of model no., e.g. FSWS-30/11/PA/S.)
- **Optional:** Firering is provided with three (3) black bolt-on spade anchors to secure ring on site, buried in ground (indicated by "/AL" in model no., e.g. FSWS-30/11/AL).



## AVAILABLE OPTIONS

### Utility Shelf

**RJ Thomas Mfg. Co., Inc.**



PO Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796  
E-mail: [pilotrock@rjthomas.com](mailto:pilotrock@rjthomas.com) • Web Site: <http://www.pilotrock.com>

© 2017 RJ Thomas Mfg. Co., Inc. PILOT ROCK® Park Products is a registered trademark of RJ Thomas Mfg. Co., Inc.

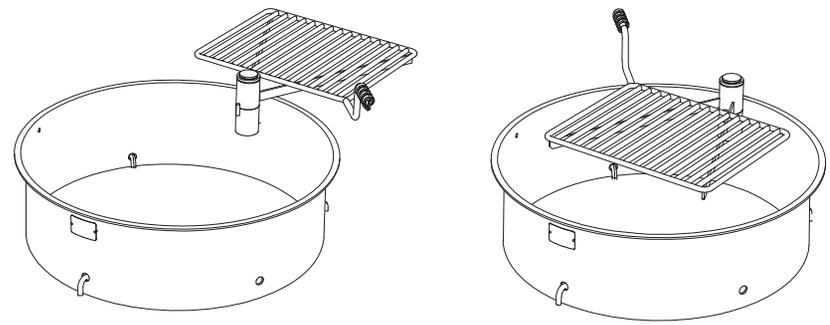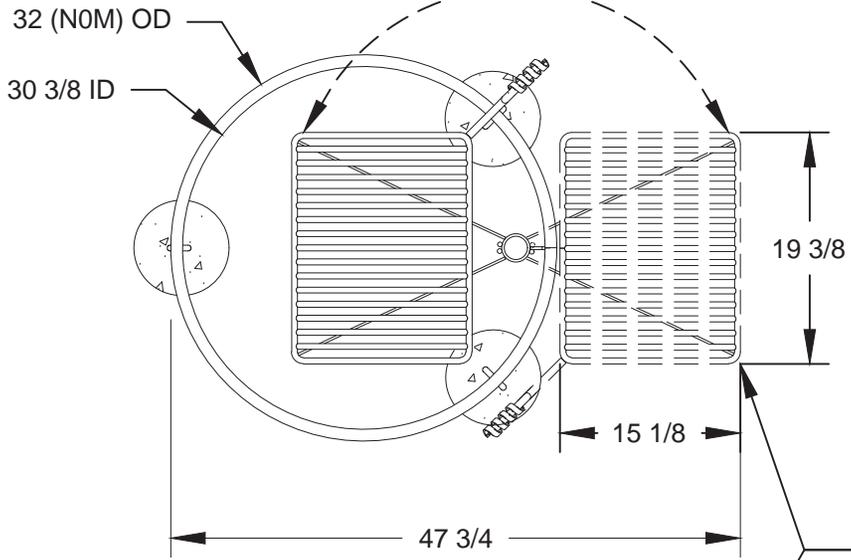

GRATE ROTATES  
180 DEGREES  
TO OUTSIDE FIRERING

MODEL NUMBER	DIMENSION		
	a	b	c
FSWS-30/7	13 7/8	7 1/4	10
FSWS-30/9	15 1/2	8 7/8	11 5/8
FSWS-30/11	17 7/8	11 1/4	14

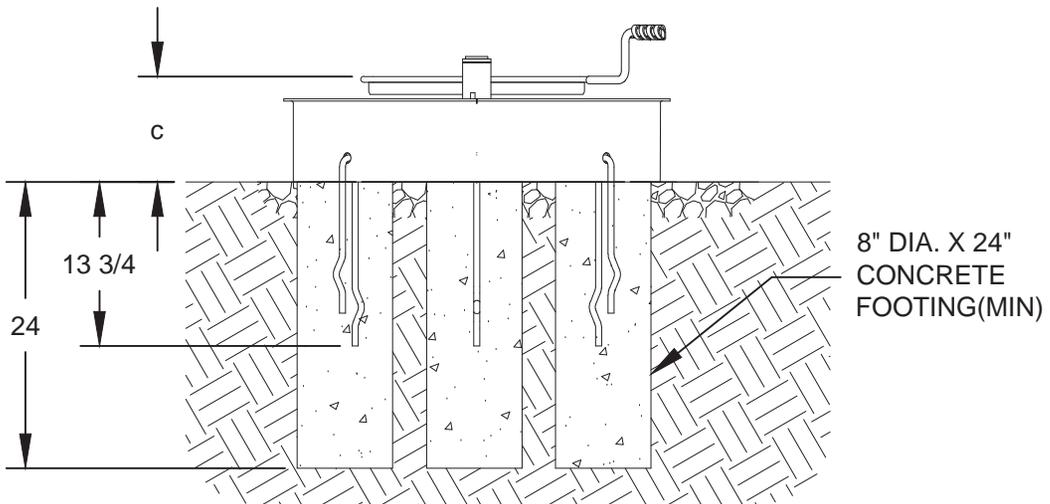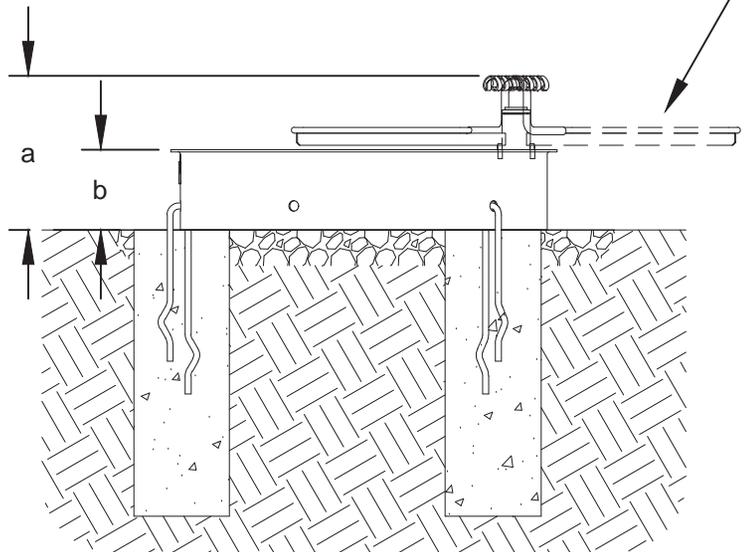

8" DIA. X 24"  
CONCRETE  
FOOTING(MIN)

ALL DIMENSIONS IN INCHES

**RJThomas Mfg. Co., Inc.**  
P.O. Box 946 • Cherokee, IA 51012-0946

DRAWN BY  
**JGJ**

TITLE FSWS SERIES MODELS FSWS-30/7/PA, FSWS-30/9/PA AND FSWS-30/11/PA  
STAINLESS STEEL SWIVEL GRATE FIRE RING WITH PIN ANCHORS

DATE 10-12-17

DWG. NO. AI-2091