
## WXT Series 10 Foot Universal Access Table with H-Type Thermo-plastic PARK · STREET · CAMP **Coated Perforated Steel Top and Seats**

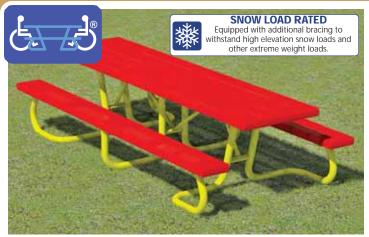

Pilot Roc

SITE PRODUCTS

Model WXT/CY-10HR 10 Ft. Portable, Universal Access Rectangular Table with yellow powder coated frames and red H-Type thermo-plastic coated perforated steel top and seats

- Snow load/extreme load rated to 1420 lbs. per square foot
- Top and seats designed for more abusive environments such as high elevations where snow loads can destroy average tables
- Constructed specifically for heavy use ٠ areas
- Nontip, nontrip, walk-through design, wheelchair accessibility at each end
- Full capacity seating when wheelchairs are not in place
- All welded end frames are fabricated from 2-3/8" diameter steel pipe
- Diagonal braces align and strengthen entire table
- Frames are hot dip galvanized after fabrication for superior corrosion resistance
- Thermo-plastic Coating heat fused to Perforated Steel Top and Seats for durability
- Thermo-plastic Coating formulated with U.V. stabilizers for ultraviolet protection
- Limited Lifetime Warranty on frames

## **AVAILABLE OPTIONS**

Powder Coat Finish in choice of colors on steel frame components

Choice of colors of Thermo-plastic Coating

## **SPECIFICATIONS:**

• WXT Series end frames are one-piece welded construction, fabricated from 2.375" (2-3/8") O.D. x 10 ga. wall steel pipe to meet 2" nominal steel pipe size specifications with 2" x  $2'' \ge 1/8''$  die-formed steel angle for attaching seats and top. Bends are tightly formed to prevent tipping when weight is on one side.

**SPECIFICATION BULLETIN** 

**#SPC-TB-175** 

REV. 02-25

- Frame design provides the ADA recommended wheelchair clearances under the table top of: 30" wide, 27" high and 24" total knee and toe clearance (19" knee + 5" toe) at each end of the table while maintaining full seating capacity of the table.
- Snow Load Capacity: This table has been independently tested to meet the U.S. Forest Service snow load requirement of 1420 lbs. per square foot. (Test results available upon request)
- Table frame design incorporates nontip, nontrip, walkthrough features.
- Model WXT/G-10 is a nom. 10 ft. in length with three frames.
- Nominal table height is 30". Frame design provides a nominal 28" of clearance from ground level to the underside of table. Nominal seat height is 18".
- Frames are supported by diagonal braces of 1-5/16" O.D. x 14 ga. wall steel pipe connected to the table top.
- All fasteners are provided for assembly.
- **Standard:** All steel frame components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. WXT/G-10HW).
- •H-Type table top and seats are each a one-piece welded construction, fabricated from a 14 ga. perforated steel surface with 9/16" dia. holes in a 13/16" center to center in-line pattern and 2-1/2" x 10 ga. roll-formed vertical edges on all sides reinforced by a 10 ga. die-formed angle substructure. Substructure includes all mounting holes for easy assembly of table.
- Standard: All steel surfaces of the top and seats are covered with a thermo-plastic coating in a Brown color (indicated by "HW" in model no., e.g. WXT/G-10HW). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- **Optional:** All steel frame components have powder coat finish. See Specification Bulletin #SPC-CO-001.
- Optional: Color choices of Thermo-plastic coated steel components. For optional colors choices see Specification Bulletin #SPC-CO-001.
- •U.S. Patent Nos. D489,539; D490,992; D493,291; D496,799; D497,262; 6,918,630

RJ Thomas Mfg. Co., Inc. PO Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796 E-mail: customerservice@rjthomas.com • Web Site: https://www.pilotrock.com  $igodoldsymbol{{igodoldsymbol{{igodoldsymbol{{B}}}}}$  2025 RJ Thomas Mfg. Co., Inc. BI Thomas Mfg. Co., Inc.

