

## MODEL C2-36 PREMIER PARK GRILL

SPECIFICATION BULLETIN
#SPC-GR-003

REV. 07-09



Model C2-36/SS B2 Grill with two Optional Utility Side Shelves


- Two infinitely adjustable cooking grates
- Structurally reinforced grates are virtually indestructible
- Grates tip back for fire building and cleaning
- Integral ash retainer flange prevents ashes from falling from the firebox and combats heat warpage
- Firebox bottom is ring-reinforced against heat warpage
- Theft-proof base attachment
- Full 360° rotation for draft control
- Public use-type spring grips of coiled steel bar
- Utility shelf option
- Quality construction throughout

## **AVAILABLE OPTIONS**

One or Two Side Utility Shelves Portable Disk Base Bolt-down Base Plate Base Portable Caster Base

## **SPECIFICATIONS:**

- **Model C2-36 B2** has a cooking area of 640 sq. in. with two grates and a 20" x 32" firebox with nom. 8" high sides and a center dividing panel.
- Entire firebox is fabricated from 3/16" steel plate. All exposed corners are rounded to 1-1/2" radius and all edge connections are entirely welded. Firebox is ring reinforced and allowance for drainage is provided. The firebox has an integral ash retainer die-formed across the open ends of the firebox.
- Grates are infinitely adjustable from 3-3/4" to 10-1/2" above the bottom of the firebox and tip back to provide unobstructed access to the firebox for cleaning and fire building.
- Grates is structurally reinforced so that they will support the weight of two or more persons without sagging or bending.
- Grates are secured to firebox by 2 vertical 3/4" dia. A-36 steel bars that allow adjustment and prevent removal of grates from the grill.
- Grates are constructed from 5/8" dia. A-36 steel bars around the perimeter and handles and 1/2" dia. A-36 steel bars to provide the grate surface.
- $\bullet$  Grates are each provided with two substantial spring grip handles suitable for use by the public made from 1/8" x 1/2" steel flat bar.
- A base attachment mechanism constructed from 3/16" steel plate is provided that is absolutely theft-proof, allows unrestrained continuous rotation in either direction and maintains a stable cooking surface.
- **Standard:** Grill is supported by a 3-1/2" O.D., 40" long, steel pipe for permanent installation in concrete footing (indicated by B2 in model no., e.g. C2-36 B2).
- Entire unit is finished in high temperature, heat resistant, nontoxic black enamel.
- **Optional:** The grill is provided with a 3/16" x 7-1/8" x 9-5/8" steel plate utility shelf. Add /S to model no. for 1 shelf; add /SS for 2 shelves, e.g. C2-36/S B2 or C2-36/SS B2.
- Optional: Grill is provided with a bolt-down base plate base for hard surface mounting applications. Replace "B2" in model no. with "B3", e.g. C2-36 B3.
- **Optional:** Grill is provided with a portable disc base. Replace "B2" in model no. with "B4", e.g. C2-36 B4.
- **Optional:** Grill is provided with a portable caster base. Replace "B2" in model no. with "B14", e.g. C2-36 B14.

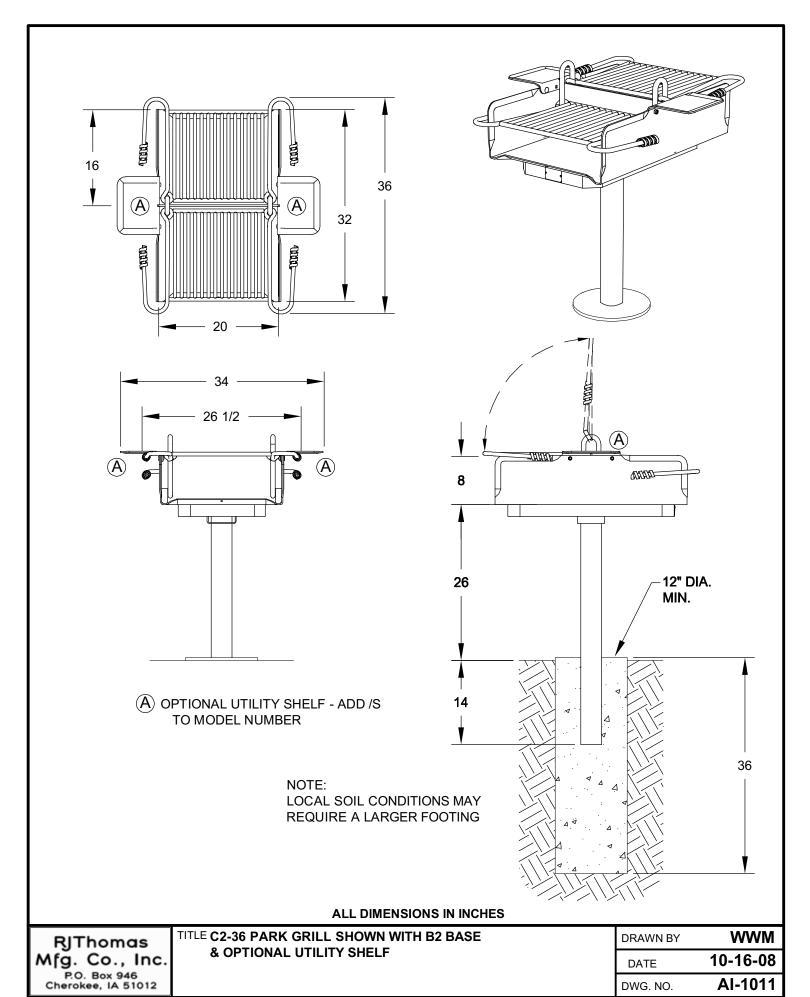

Specification Bulletin #SPC-GR-003