



Model CN-R/SS3/TN-ASH Round Wave Steel Strap Ash Receptacle, green Thermo-plastic coated.

- **Welded steel fabrication**
- **Thermo-plastic coated finish**
- **Deep, large capacity aluminum sand bowl**
- **Large choice of colors**
- **Choice of mounting options**

SPECIFICATIONS:

- **Model CN-R/SS3-ASH Series** ash receptacle is an all-welded construction, fabricated from 1/8" x 1" die-formed vertical steel straps with two internal 1/8" thick steel support rings. designed to match the CN-R/SS3-36 trash receptacle holder.
- The receptacle is reinforced with a 1" OD, 14 ga. wall round steel tube top ring, and a 10 ga. bottom ring with die-formed cross braces across the bottom providing holes for surface anchoring or elevated mounting options.
- **Model CN-R/SS3-ASH** is 20" O.D. x 29" high.
- **Standard:** All steel surfaces of the receptacle are covered with a thermo-plastic coating in a Brown color (indicated by "/TW" in model no., e.g. CN-R/SS3/TW-ASH). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- Receptacle includes a large capacity aluminum sand bowl. Sand bowl is tethered to receptacle with steel cable to prevent theft. An eight pound bag of sand is included.
- **Optional:** Color choices of thermo-plastic coated steel components. See Specification Bulletin #SPC-CO-001.
- **Optional:** Receptacle can mounted on the following elevated mounts:

Embedded Mount

Model M10/G: 1.90" OD x 11 ga. steel tube post welded to a 10 ga. steel formed mounting plate, four 7/16" bolt holes match plate in the bottom of each ash receptacle. Post is embedded into a concrete footing. Supports receptacle 8" above ground.

Surface Mount

Model M11/G: 1.90" OD x 11 ga. steel tube post welded to a 10 ga. steel formed mounting plate, four 7/16" bolt holes match plate in the bottom of the ash receptacle. Post includes a 1/4" x 8" x 8" square base plate to be anchored to surface (anchor bolts not included). Supports receptacle 8" above ground.

MOUNTING OPTIONS

Model M10/G Embedded Pedestal Mount: elevated concrete embedded installation




Model M11/G Surface Pedestal Mount: elevated base plate on installation

RJ Thomas Mfg. Co., Inc.

PO Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796
E-mail: pilotrock@rjthomas.com • Web Site: <http://www.pilotrock.com>

© 2012 RJ Thomas Mfg. Co., Inc. PILOT ROCK® Park Products is a registered trademark of RJ Thomas Mfg. Co., Inc.

20 OD

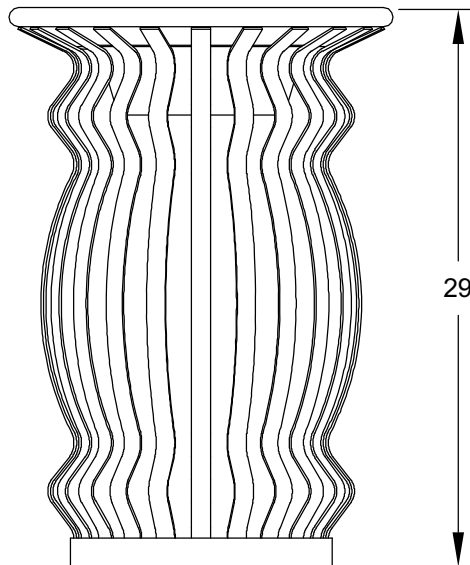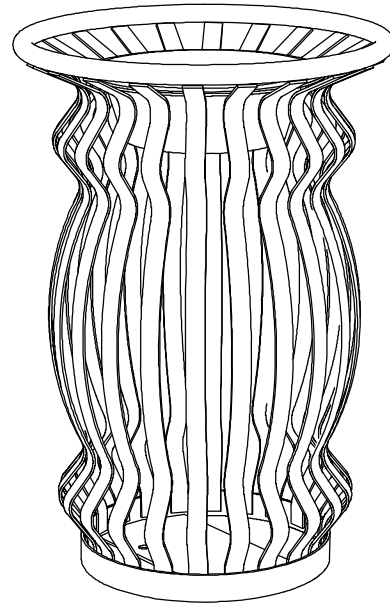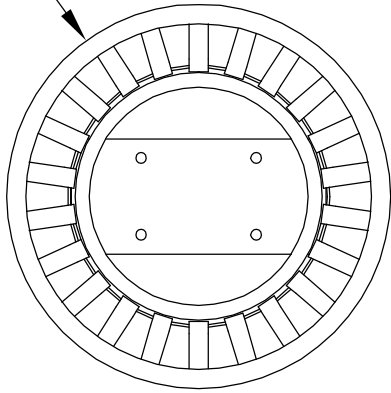

ALL DIMENSIONS IN INCHES

RJThomas
Mfg. Co., Inc.
P.O. Box 946
Cherokee, IA 51012

TITLE **MODEL CN-R/SS3-ASH ROUND THERMO-PLASTIC COATED**
WAVE STEEL STRAP ASH RECEPTACLE

DRAWN BY	WWM
DATE	9-20-12
DWG. NO.	AI-2048